

Concept-5™

Jar and Tall Product X-ray Inspection System

The **Concept-5™** X-Ray System is specifically designed for the rapid automatic inspection of Jar, bottle, and other tall product.

Using the **HyperSwitch™** processing platform, this system can simultaneously detect product defects such as:

- Foreign Objects (Metal/Glass/Stone)
- Shape
- Weight/Mass
- Item Count
- Item position
- Cross sectional density/uniformity
- Presence/absence of an item
- Fill level detection

Please refer to the **HyperSwitch™** data sheet for a detailed description of the imaging processing and remote access capabilities.

Concept-5™ is optimized for side product inspection. The unique geometry enables unparalleled detection capability. This inspection performance is unmatched even with much more expensive multi-view systems.



Model C5-0609-8002


Concept-5's is completely stainless steel and meets IP65/NEMA-4 standards to enable no nonsense cleaning. The FDA compliant conveyor system can be easily disassembled for external cleaning.

Feature Highlights


- **HyperSwitch™** software allows unmatched contaminant detection performance
- **HyperSwitch Bene™** software automates product setup for contaminant and weight
- IP65 / NEMA-4 Wash-Down
- Conveyor and processing speeds up to 200 FPM standard, higher available
- Time-stamped data/setup archive may be viewed by many methods
- Minimal product spacing is required with no external photo-eye devices
- Conveyor belt is FDA compliant and can be easily removed for cleaning
- Air-blast and push-arm conveyor rejecter mechanisms
- Small footprint in 100% Type 304 stainless-steel construction
- Ethernet interface for remote archive, control, and service options

Technical Overview

Inspection Size



Machine Size

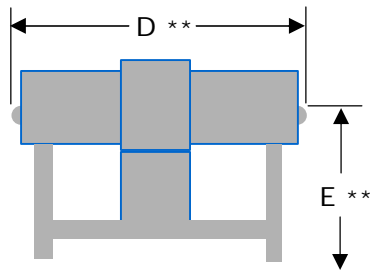

Model Number	A	B	C	D	E
C5-0609-XXXX	6.0	6.0	9.0	60.0	34 - 37

- * Active area is completely square, no missing corners
- ** Custom conveyor heights and lengths available
- *** Model number (XXXX) is the x-ray power, e.g. 8002 for 80Kv/2ma

Key Technical Specifications

Belt Speed	Up to 200 FPM maximum
Inspection Rate	Up to 500 products/min
Contaminant Detection	0.6 mm SS sphere minimum Metal/Stone/Glass
Detection Aperture	Full tunnel coverage No missing corners
Power Service	230VAC 50/60hz 15amp 1Ø service
X-ray Generator	30 to 80 KeV, 160 watt
Environment	IP65 / NEMA-4 Wash-down
Temperature	0 to 40°C (32 to 100°F)
Cabinet	Type 304 stainless steel glass bead finish
Conveyor	FDA Compliant Polyurethane
Cooling	External A/C
Processing System	HyperSwitch™ on QNX O/S
Communication	TCP/IP over Ethernet
Reject System	Air blast or Push-arm, Drop Chute, or Retracting Nose
Automatic Setup	Contaminant and Weight
Display	15" diagonal TFT-LCD touch screen, rated IP-65

Novus X-Ray LLC
243 N. Union Street
Suite 130
Lambertville, NJ 08530

Tel. 215.962.3171
Fax 609.249.5124
Email sales@novusxray.com
Web www.novusxray.com

